
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

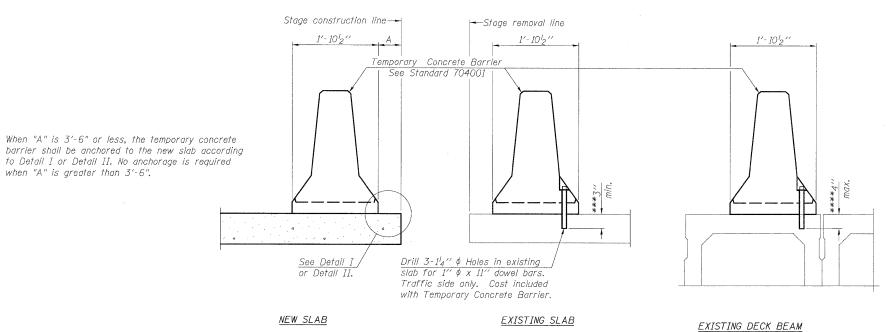

NOTES


Detail I - With Bar Splicer or Couplers:
Connect one (1) 1"x7"x10" steel P to the top layer of couplers with $2^{-5}8'' \phi$ bolts screwed to coupler at approximate € of each barrier panel.

Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x 10" steel 12 to the concrete slab or concrete wearing surface with 2-58" \$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate © of each barrier panel. Cost of anchorage is included with Temporary Concrete Barrier.


The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM


- *** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

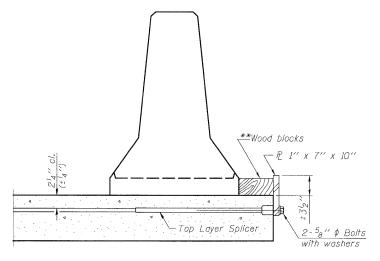

DETAIL I

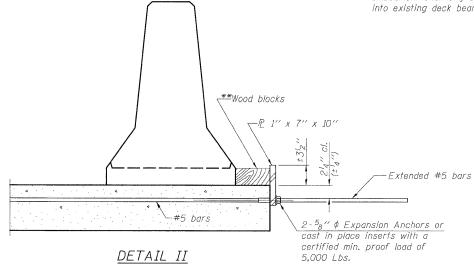

minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact



STEEL RETAINER P 1" x 7" x 10"

* Required only with Detail II

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION S.N. 026-2019

	SHEET NO.	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	8	*	114B-1(1) & 114B-1(2)	FAYETTE	54	49
	OF 9 SHEETS	* F.A.P. RTE. 750, F.A.S. RTE. 719 CONTRACT NO. 74110				
		FED. RO	DAD DIST. NO. ILLINOIS FED. A	ID PROJECT		

**Wood blocks may be omitted when required to provide with the steel retainer plate.

DESIGNED SCD CHECKED DRB DRAWN THW CHECKED SCD

R-27

le consultants, inc 6420 SOUTH SIXTH STREET SPRINGFIELD, ILLINOIS 62712 TEL. (217) 529-8027 FAX (217) 529-4643 IESPRINGFIELD@IE-CONSULTANTS.COM WWW.IE-CONSULTANTS.COM

10-1-08